

| Main Information | |
|------------------------------------|---------------|
| Nb of Inverter Stations (MVPS) | 4 |
| Nb of Array Boxes | 45 |
| Nb of strings | 1134 |
| Nb of trackers | 378 |
| Nb of panels | 34020 |
| Nb of panels/Strings | 30 |
| Nb of Strings/Tracker | 3 |
| DC Power of PV plant | 10 886 400 Wp |
| Max AC Power of PV plant (at PF=1) | 9.2 MVA |
| Area of PV plant | 29.58 ha |
| Perimeter of PV plant | 2993.82 m |
| Type of Inverter | SC2500 |
| Pitch | 5.7m |

- LEGEND :
- Site outer boundary
 - Site inner boundary
 - Existing overhead line
 - Fence
 - Site Roads (unsealed)
 - 2.5 MVA Inverter Station Block
 - Existing vegetation
 - Existing road
 - Swale Drain
 - Vegetation buffer (5m wide) indicative
 - Vegetation buffer(10m wide)
 - Fire Protection Water Tank 10000 L
 - 10m Asset Protection Zone

| | | | | |
|---|------------|----------|----------|----------|
| H DELIVERY STATION, HARMONIC FILTER, STORAGE CONTAINER | WLG | 01/06/17 | CLS | 01/06/17 |
| G PILES ADDED IN ROW 82.83.87.88 | WLG | 17/05/17 | CLS | 17/05/17 |
| F ROAD, O&M BLDGS & DELIVERY STATION & HARMONIC FILTER | WLG | 24/10/17 | CLS | 24/10/17 |
| E ROAD,FENCE,O&M BLDGS & DELIVERY STATION & HARMONIC FILTER | WLG | 04/10/17 | CLS | 04/10/17 |
| D HARMONIC FILTER,IFC ROAD,PV IN MVPS 3, MVPS 2 MOVED EAST | WLG | 28/03/17 | CLS | 28/03/17 |
| C TRACKERS DIRECTION | WLG | 22/02/17 | CLS | 22/02/17 |
| B CHANGE ABOX AND O & M BUILDING LOCATION | W. GUANZON | 11/02/17 | CLS | 11/02/17 |
| A ROUTING OF ROAD,FENCE, RELOCATION OF O & M AND WAREHOUSE | W. GUANZON | 04/02/17 | CLS | 04/02/17 |
| I CONCEPT DESIGN - NOT FOR CONSTRUCTION | A. Jaloud | 05/12/16 | CLS | 05/12/16 |
| N Modifications | Made by | Date | Check by | Date |

Customer :

neoen
renouvelle l'énergie

N° of Project :

NARROMINE SOLAR PHOTOVOLTAIC POWER PROJECT

EPC Contractor :



BOUYGUES CONSTRUCTION AUSTRALIA **Shaping a Better Life**

Title document :


**NARROMINE SOLAR FARM
GENERAL LAYOUT**

| Drawn By : | Checked By : | Approved By : | Date | Scale | Format | Sheet |
|------------|--------------|---------------|----------|--------|--------|-------|
| W. GUANZON | CLS | JMC | 01/06/17 | 1:2000 | A1 | 1/2 |

| Project Title | Area Code | Issuer | Doc type | Pack code | Seq N° | Rev |
|---------------|-----------|--------|----------|-----------|--------|-----|
| NEON | NAB | YGD | WL | LA | 1000 | H |

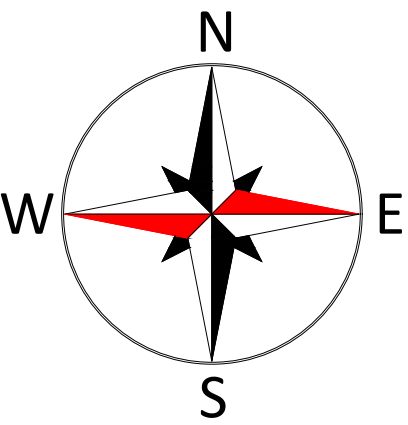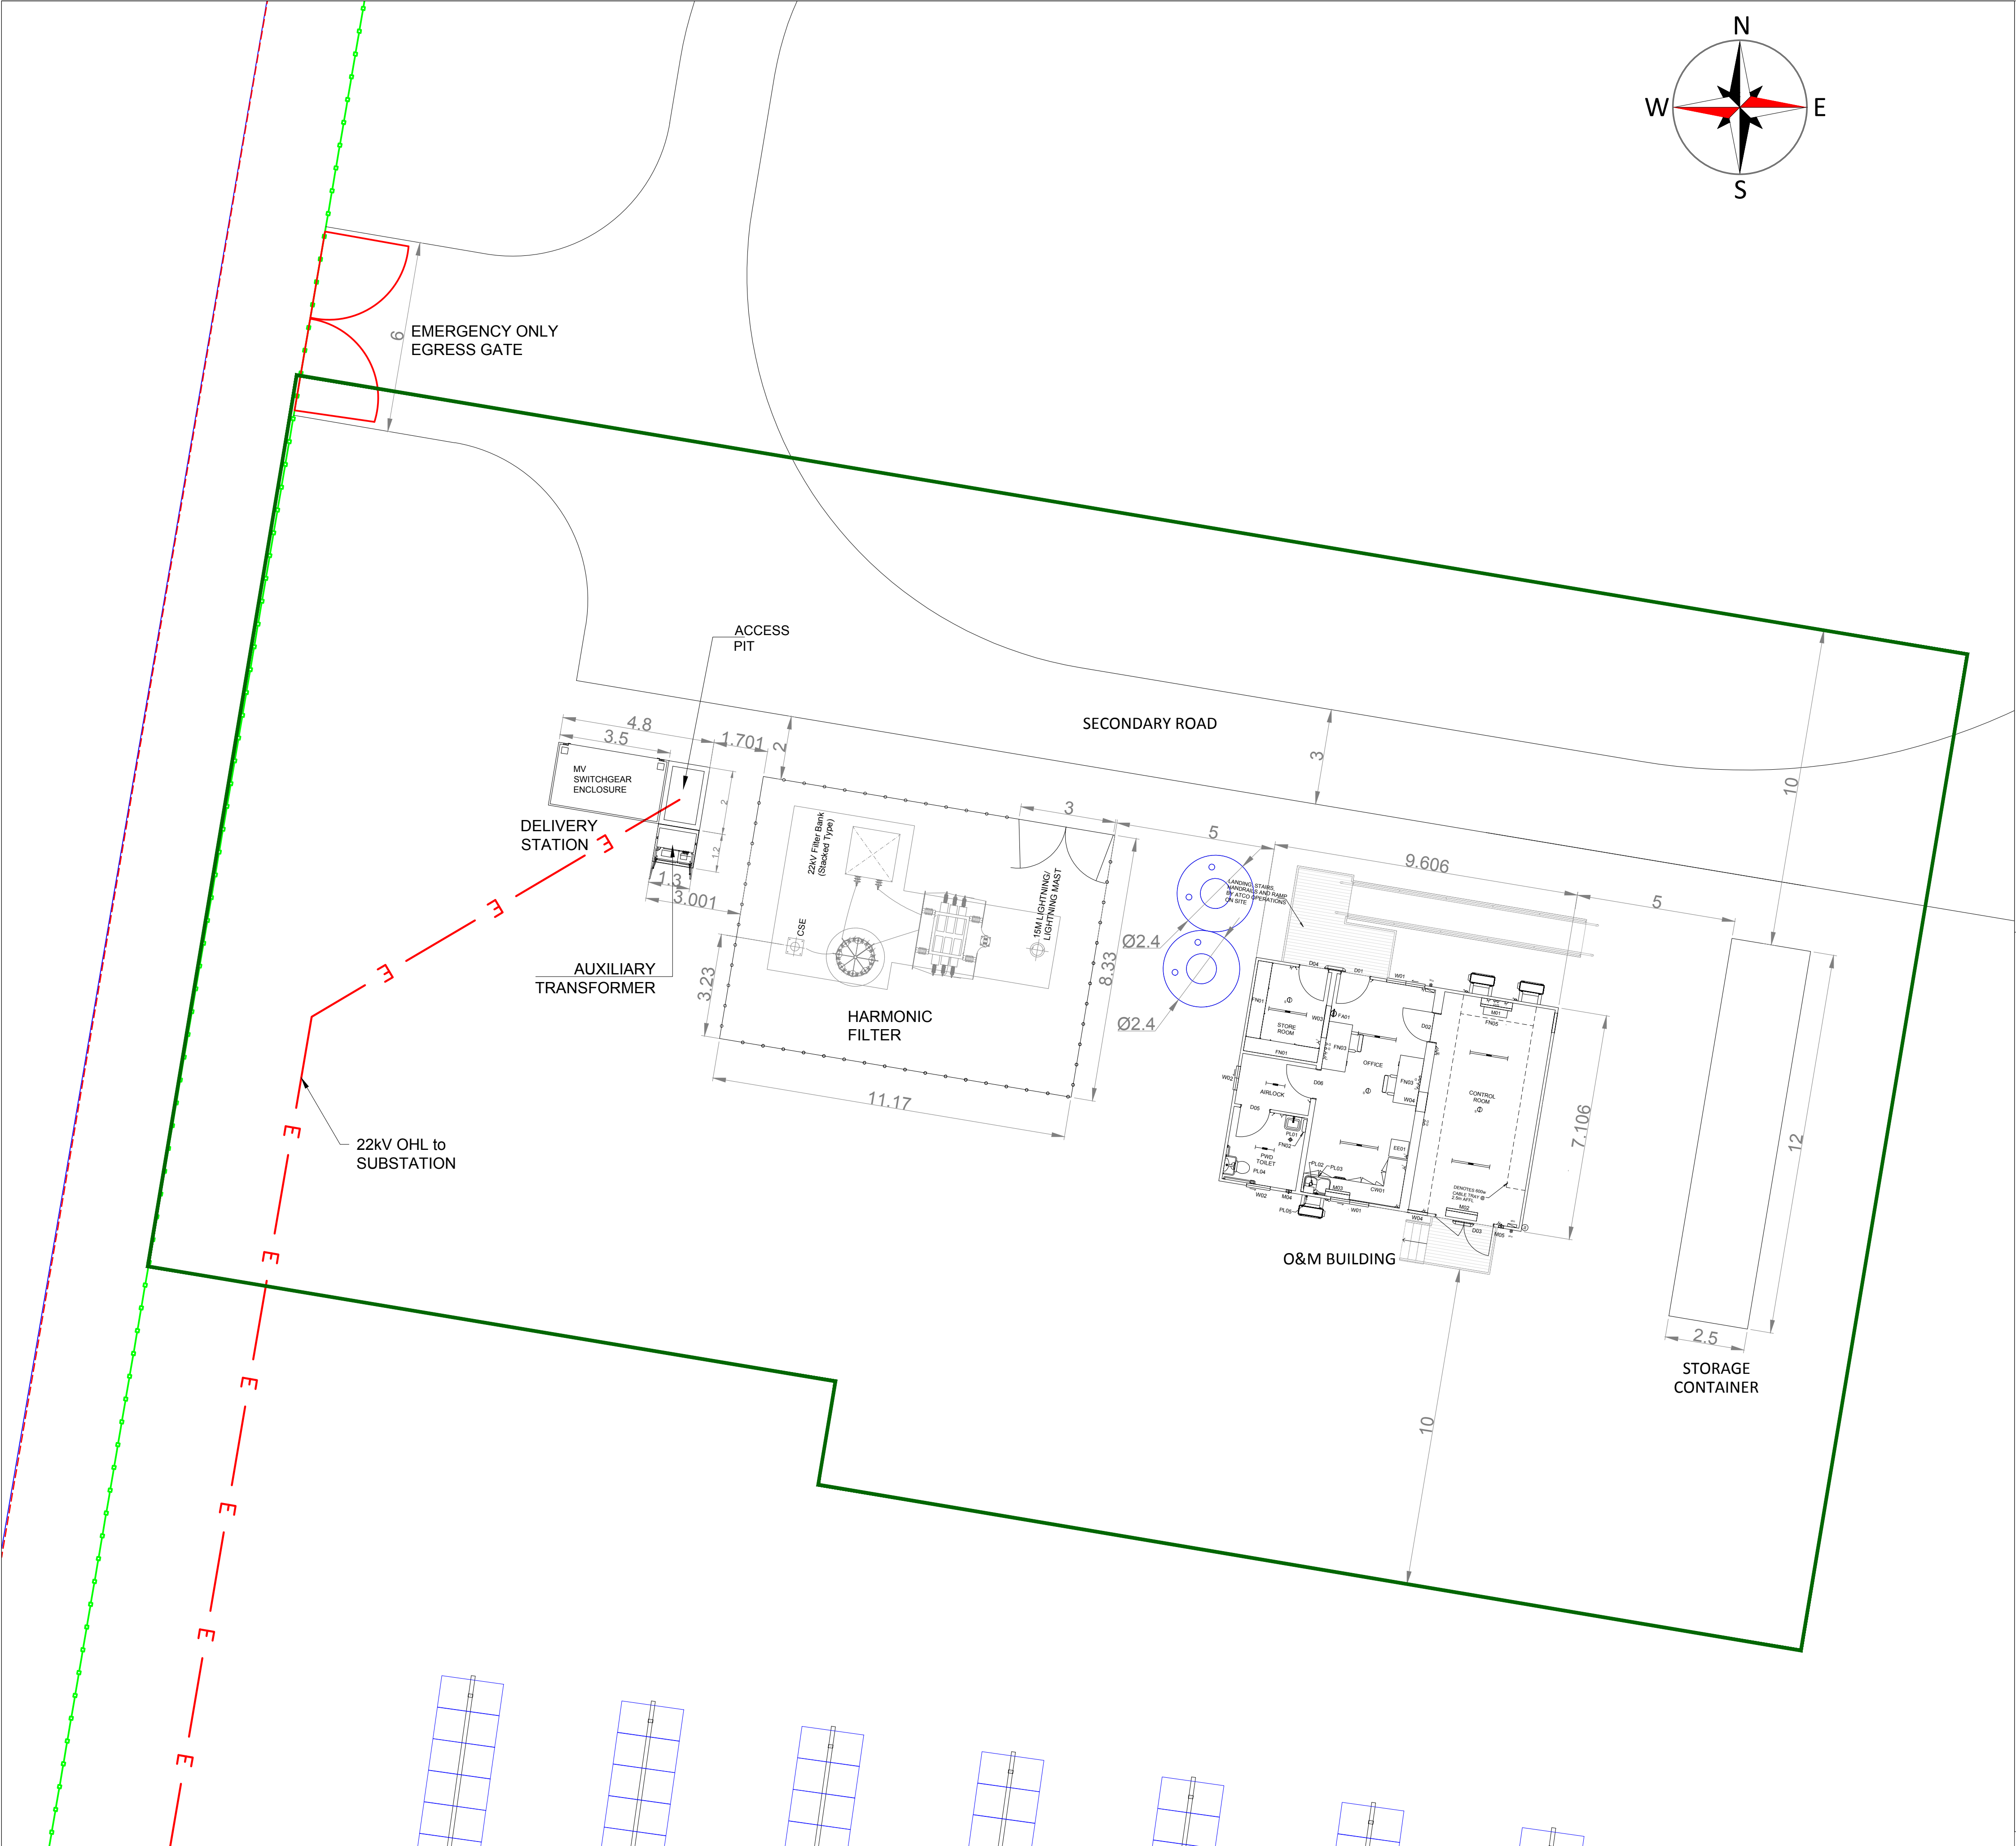

- LEGEND:
- Fence
 - Fire Protection Water Tank 10000 L
 - 10m Asset Protection Zone

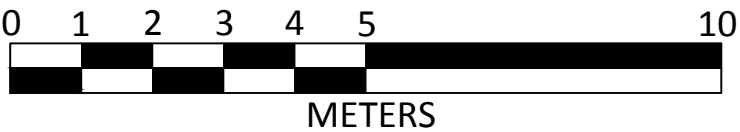

| | | | | | |
|------------------|---|------------|----------|----------|----------|
| H | DELIVERY STATION, HARMONIC FILTER, STORAGE CONTAINER | WLG | 01/06/17 | CLS | 01/06/17 |
| G | PILES ADDED IN ROW 82.83.87.88 | WLG | 17/05/17 | CLS | 17/05/17 |
| F | ROAD, O&M BLDGS & DELIVERY STATION & HARMONIC FILTER | WLG | 24/10/17 | CLS | 24/10/17 |
| E | ROAD, FENCE, O&M BLDGS & DELIVERY STATION & HARMONIC FILTER | WLG | 04/10/17 | CLS | 04/10/17 |
| D | HARMONIC FILTER, JFC ROAD, PV IN MVPS 3, MVPS 2 MOVED EAST | WLG | 28/03/17 | CLS | 28/03/17 |
| C | TRACKERS DIRECTION | WLG | 22/02/17 | CLS | 22/02/17 |
| B | CHANGE ABOX AND O & M BUILDING LOCATION | W. GUANZON | 11/02/17 | CLS | 11/02/17 |
| A | ROUTING OF ROAD, FENCE, RELOCATION OF O & M AND WAREHOUSE | W. GUANZON | 04/02/17 | CLS | 04/02/17 |
| 0 | CONCEPT DESIGN - NOT FOR CONSTRUCTION | A. Jelloul | 05/12/16 | CLS | 05/12/16 |
| N° Modifications | | Made by | Date | Check by | Date |

Customer :



N° of Project :

NARROMINE SOLAR PHOTOVOLTAIC POWER PROJECT

EPC Contractor :



Title document :

NARROMINE SOLAR FARM
O & M AND DELIVERY STATION
DETAIL A

| | | | | | | |
|------------|--------------|---------------|----------|-------|--------|-------|
| Drawn By : | Checked By : | Approved By : | Date | Scale | Format | Sheet |
| W. GUANZON | CLS | JMC | 01/06/17 | 1:100 | A1 | 2/2 |

| | | | | | | |
|---------------|-----------|--------|----------|-----------|--------|-----|
| Project Title | Area Code | Issuer | Doc type | Pack code | Seq N° | Rev |
| NEON | NAB | YGD | WL | LA | 1000 | H |